



ELECTRIC POWER RATINGS GUIDE

GENERATOR SETS



CONTENTS

Cat® Diesel Generator Sets	
50 Hz Ratings	4
50 Hz Ratings – Power Plants	6
50 Hz Ratings – Heavy Fuel	7
50 Hz Ratings – Dual Fuel	8
60 Hz Ratings	9
60 Hz Ratings – Power Plants	12
60 Hz Ratings – Heavy Fuel	13
60 Hz Ratings – Dual Fuel	14
50 Hz – Rental	15
60 Hz – Rental	16
Rating Definitions	17
Cat Gas Generator Sets	
50 Hz Ratings – Continuous	20
50 Hz Ratings – Dual Fuel	21
50 Hz Ratings – Natural Gas – Standby	22
50 and 60 Hz Ratings – Natural Gas – Prime and Standby	23
60 Hz Ratings – Propane	24
60 Hz Ratings – Standby – 50 and 60 Hz Rental	25
60 Hz Ratings – Continuous	26
60 Hz Ratings – Dual Fuel	27
Rating Definitions	27
Renewable Energy Products	
Photovoltaic	28
Energy Storage	30
Controls	31
Home and Outdoor Power Products	
50 Hz – Gasoline	34
60 Hz – Gasoline	35
EMCP 4	38
Systems Products	42
Reference Guide	48
Product Support – Definitions	55
Product Support – Customer Support Agreements	56
Notes	56

DIESEL GENERATOR SETS



C32

50 Hz DIESEL RATINGS, 6,8 – 218 kVA

kVA		Generator Set Model	Engine	Configuration
Standby	Prime			
Single Phase Output* 1500 rpm				
7.5	6.8	DE7.5E3S	C1.1	EU Stage IIIA
11	10	DE11E3S	C1.5	EU Stage IIIA
12	11	DE12E0S	C1.5	Low BSFC
14	13	DE14E3S	C2.2	EU Stage IIIA
16.5	15	DE16E3S	C2.2	EU Stage IIIA
26	24	DE26E0S	C3.3	Low BSFC
26	24	DE26E3S	C3.3	EU Stage IIIA
40	36	DE40E0S	C3.3	Low BSFC
40	36	DE40E2S	C3.3	EU Stage II
50	45	DE50E0S	C3.3	Low BSFC
55	50	DE55E3S	C4.4	EU Stage IIIA
90	82	DE90E2S	C4.4	EU Stage II
90	82	DE90E3S	C4.4	EU Stage IIIA
Three Phase Output** 1500 rpm				
9.5	8.5	DE9.5E3	C1.1	EU Stage IIIA
13.5	12.5	DE13.5E3	C1.5	EU Stage IIIA
16	14.5	DE16E0	C1.5	Low BSFC
18	16.5	DE18E3	C2.2	EU Stage IIIA
22	20	DE22E3	C2.2	EU Stage IIIA
33	30	DE33E0	C3.3	Low BSFC
33	30	DE33E3	C3.3	EU Stage IIIA
50	45	DE50E0	C3.3	Low BSFC
50	45	DE50E2	C3.3	EU Stage II
55	50	DE55E0	C3.3	Low BSFC
55	50	DE55E2	C4.4	EU Stage II
65	60	DE65E0	C3.3	Low BSFC
65	60	DE65E3	C4.4	EU Stage IIIA
88	80	DE88E0	C4.4	Low BSFC
88	80	DE88E3	C4.4	EU Stage IIIA
110	100	DE110E2	C4.4	EU Stage II
110	100	DE110E3	C4.4	EU Stage IIIA
150	135	DE150E0	C7.1	Low BSFC
165	150	DE165E0	C7.1	Low BSFC
165	150	DE165E3	C7.1	EU Stage IIIA
175	160	DE175E3	C7.1	EU Stage IIIA
200	180	DE200E0	C7.1	Low BSFC
200	180	DE200E3	C7.1	EU Stage IIIA
218	200	DE220E0	C7.1	Low BSFC

*All ratings at 1.0 pf. **All ratings at 0.8 pf.

50 Hz DIESEL RATINGS, 230 – 715 kVA

kVA		Generator Set Model	Engine	Configuration
Standby	Prime			
1500 rpm				
250	230	DE250E0	C9	Low BSFC
275	250	DE275E0	C9	Low BSFC
275	250	DE275E3	C9	EU Stage IIIA
300	275	DE300E0	C9	Low BSFC
300	275	DE300E3	C9	EU Stage IIIA
330	300	DE330E0	C9	Low BSFC
—	350	DE350C3	C13	China Non-Road Stage III
—	400	DE400C3	C13	China Non-Road Stage III
400	350	DE400E0	C13	Low BSFC
450	400	DE450E0	C13	Low BSFC
450	400	DE450E3	C13	EU Stage IIIA
450	400	—	C15*	Low BSFC
—	450	DE450C3	C15	China Non-Road Stage III
—	500	DE500C3	C15	China Non-Road Stage III
500	455	DE500E0	C15**	Low BSFC
550	500	DE550E0	C15**	Low BSFC
550	500	DE550E3	C15	EU Stage IIIA
605	550	DE605E0	C18**	Low BSFC
—	600	DE600C3	C18	China Non-Road Stage III
660	600	DE660E0	C18**	Low BSFC
700	635	—	C18*	Low BSFC
715	650	DE715E0	C18**	Low BSFC

*Available in Brazil only. **Nomenclature in Brazil by Engine name only.

50 Hz DIESEL RATINGS, 680 – 2500 kVA

kVA				Generator Set Model	Configuration
Standby	Mission Critical	Prime	Continuous		
1500 rpm					
750	—	680	—	3412C	Low BSFC
800	—	725	—	3412C	Low BSFC
900	—	810	—	3412C	Low BSFC
1100	1100	1000	910	C32	Low BSFC, Low Emissions
1250	1250	1100	—	C32	Low BSFC
1250	1250	1150	1000	3512	Low BSFC
1400	1400	1275	—	C32	Low BSFC
1400	1400	1275	1206	3512	Low BSFC
1500	1500	1375	—	C32	Low BSFC
1500	1500	1360	—	3512B	Low BSFC, Low Emissions
1600	1600	1500	1320	3512B	Low BSFC, Low Emissions
1750	1750	1600	—	3512B	Low BSFC, Low Emissions
1875	1875	1700	1500	3512B	Low BSFC, Low Emissions
2000	2000	1825	1600	3516	Low BSFC
2250	2250	2000	—	3516C	Low Emissions
2250	2250	2000	1750	3516B	Low BSFC, Low Emissions
—	—	2000	1750	3516B DGB	Low BSFC

50 Hz DIESEL RATINGS, 2500 – 4000 kVA

Standby	kVA			Generator Set Model	Configuration
	Mission Critical	Prime	Continuous		
1500 rpm					
—	—	2275	2000	3516B DGB	Low BSFC
2500	2500	2275	—	3516C	Low Emissions
2500	2500	2275	2000	3516B	Low BSFC, Low Emissions
2750	2750	2500	—	3516C	Low BSFC, Low Emissions
3000	3000	2750	—	3516C	EPA Tier 2
3000	3000	2750	—	3516E	Low Emissions
3000	3000	2750	—	3516E	Low BSFC
3000	3000	2725	2500	C175-16	Low BSFC, Low Emissions
3125	3125	2800	—	3516C	EPA Tier 2
3500	3500	3125	—	3516E	EPA Tier 2
3900	3900	3500	3150	C175-20	Low BSFC, Low Emissions
4000*	4000*	3600*	3250*	C175-20	Low BSFC, Low Emissions

*Rating does not include package mounted radiator.

50 Hz – POWER PLANTS

DIESEL RATINGS, 1963 – 7150 kVA

Standby	kVA		Generator Set Model	Configuration
	Prime	Continuous		
1000 rpm				
2688	2425	2200	3606	Low BSFC
3575	3250	2938	3608	Low BSFC
—	3250	2938	C280-08	IMO/U.S. EPA Tier 2
5375	4850	4400	3612	Low BSFC
—	4850	4400	C280-12	IMO/EPA Tier 2
7150	6500	5875	3616	Low BSFC
—	6500	5875	C280-16	IMO/EPA Tier 2
750 rpm				
—	1963	—	3606	Low BSFC
—	2600	—	3608	Low BSFC
—	3925	—	3612	Low BSFC
—	5200	—	3616	Low BSFC

50 Hz DIESEL / HEAVY FUEL RATINGS, 2000 – 5400 kVA

Continuous		Generator Set Model*	Configuration
kVA	bkw		
1000 rpm			
2000	1680	3606	Low BSFC
2700	2240	3608	Low BSFC
4050	3360	3612	Low BSFC
5400	4480	3616	Low BSFC

*Special rating request required.

50 Hz DIESEL / HEAVY FUEL RATINGS, 1100 – 4300 kWe

Standby	KWe*		Generator Set Model**	Configuration
	Prime	Cont.		
1000 rpm				
1100	1100	1100	6CM20C	World Bank Certification (Stage I and II)
1500	1465	1465	8CM20C	World Bank Certification (Stage I and II)
1700	1650	1650	9CM20C	World Bank Certification (Stage I and II)
750 rpm				
1900	1735	1735	6CM25C	World Bank Certification (Stage I and II)
2000	1940	1940	6CM25E	World Bank Certification (Stage I and II)
2500	2315	2315	8CM25C	World Bank Certification (Stage I and II)
2700	2585	2585	8CM25E	World Bank Certification (Stage I and II)
2800	2600	2600	9CM25C	World Bank Certification (Stage I and II)
3000	2910	2910	9CM25E	World Bank Certification (Stage I and II)
3400	3085	3085	6CM32E	World Bank Certification (Stage I and II)
4500	4115	4115	8CM32E	World Bank Certification (Stage I and II)
5100	4630	4630	9CM32E	World Bank Certification (Stage I and II)
5880	5880	5880	12CM32C	World Bank Certification (Stage I and II)
6500	6170	6170	12CM32E	World Bank Certification (Stage I and II)
7840	7840	7840	16CM32C	World Bank Certification (Stage I and II)
8700	8230	8230	16CM32E	World Bank Certification (Stage I and II)
600 rpm				
2800	2780	2780	6CM32C	World Bank Certification (Stage I and II)
3800	3700	3700	8CM32C	World Bank Certification (Stage I and II)
4300	4170	4170	9CM32C	World Bank Certification (Stage I and II)

*Electric output depends on final generator specification.

**For CM medium speed engines a project application request is required.

50 Hz DIESEL / HEAVY FUEL RATINGS, 5520 – 16400 kWe

KWe*			Generator Set Model**	Configuration
Standby	Prime	Cont.		
500 rpm				
6100	5520	5520	6CM43C	World Bank Certification (Stage I and II)
7100	6440	6440	7CM43C	World Bank Certification (Stage I and II)
8200	7360	7360	8CM43C	World Bank Certification (Stage I and II)
9200	8290	8290	9CM43C	World Bank Certification (Stage I and II)
12300	11170	11170	12CM43C	World Bank Certification (Stage I and II)
16400	14890	14890	16CM43C	World Bank Certification (Stage I and II)

*Electric output depends on final generator specification.

**For CM medium speed engines a project application request is required.

50 Hz DIESEL – DUAL FUEL RATINGS, 5290 – 15100 kWe

KWe*			Generator Set Model**	Configuration
Standby	Prime	Contin.		
500 rpm				
5600	5290	5290	6CM46DF	World Bank Certification (Stage I and II)
6600	6170	6170	7CM46DF	World Bank Certification (Stage I and II)
7500	7050	7050	8CM46DF	World Bank Certification (Stage I and II)
8500	7930	7930	9CM46DF	World Bank Certification (Stage I and II)
11300	10580	10580	12CM46DF	World Bank Certification (Stage I and II)
15100	14110	14110	16CM46DF	World Bank Certification (Stage I and II)

*Electric output depends on final generator specification.

**For CM medium speed engines a project application request is required.

60 Hz DIESEL RATINGS, 8 – 600 ekW

ekW		Generator Set Model	Engine	Configuration
Standby	Prime			
Single Phase Output 1800 rpm				
8.8	8	DE7.5E3S	C1.1	EU Stage IIIa
13	12	DE11E3S	C1.5	EU Stage IIIa
17	15.5	DE14E3S	C2.2	EU Stage IIIa
19.4	17.6	DE16E3S	C2.2	EU Stage IIIa
45	40	DE40E0S	C3.3	Low BSFC
60	55	DE50E0S	C3.3	Low BSFC
99.5	90	DE90E2S	C4.4	EU Stage II
Three Phase Output 1800 rpm				
8.8	8	DE9.5E3	C1.1	EU Stage IIIa
13.2	12	DE13.5E3	C1.5	EU Stage IIIa
17.6	16	DE18E3	C2.2	EU Stage IIIa
20	18	DE22E3	C2.2	EU Stage IIIa
30	27	DE33E0	C3.3	Low BSFC
45	40	DE50E0	C3.3	Low BSFC
50	45	DE55E0	C3.3	Low BSFC
60	55	DE65E0	C3.3	Low BSFC
80	72	DE88E0	C4.4	Low BSFC
100	90.4	DE110E2	C4.4	EU Stage II
132	120	DE150E0	C7.1	Low BSFC
150	135	DE165E0	C7.1	Low BSFC
175	160	DE200E0	C7.1	Low BSFC
200	180	DE200SE0	C9	Low BSFC
250	225	DE250SE0	C9	Low BSFC
275	250	DE275SE0	C9	Low BSFC
300	270	DE300SE0	C9	Low BSFC
300	275	DE300SE3	C9	EU Stage IIIa
350	320	DE350SE0	C13	Low BSFC
400	350	DE400SE0	C13	Low BSFC
450	410	DE450SE0	C15	Low BSFC
500	455	DE500SE0	C15	Low BSFC
550	500	DE550SE0	C18	Low BSFC
600	545	DE600SE0	C18	Low BSFC

60 Hz DIESEL RATINGS, 8 – 200 ekW

Available only for North America.

ekW		Generator Set Model	Engine	Configuration
Standby	Prime			
Single Phase Output* 1800 rpm				
8.8	8	DE7.5E3S	C1.1	ESE
13	12	DE11E3S	C1.5	ESE
17	15.5	DE14E3S	C2.2	ESE
19.4	17.6	DE16E3S	C2.2	ESE
40	36	D40S	C4.4	ESE
50	45	D50S	C4.4	ESE
60	55	D60S	C4.4	ESE
80	72	D80S	C4.4	ESE
100	90	D100S	C4.4	ESE
Three Phase Output** 1800 rpm				
8.8	8	DE9.5E3	C1.1	ESE
13.2	12	DE13.5E3	C1.5	ESE
17.6	16	DE18E3	C2.2	ESE
20	18	DE22E3	C2.2	ESE
40	36	D40	C4.4	ESE
50	45	D50	C4.4	ESE
60	55	D60	C4.4	ESE
80	72	D80	C4.4	ESE
100	90	D100	C4.4	ESE
125	114	D125	C7.1	ESE
150	136	D150	C7.1	ESE
175	158	D175	C7.1	ESE
200	—	D200	C7.1	ESE

*All ratings at 1.0 pf.

**All ratings at 0.8 pf.

ESE = "EPA Stationary Emergency".

60 Hz DIESEL RATINGS, 180 – 4000 ekW

Standby	ekW			Generator Set Model	Configuration
	Mission Critical	Prime	Continuous		
Three Phase Output** 1800 rpm					
200	—	180	—	C9	ESE
250	—	225	—	C9	ESE
300	—	275	—	C9	ESE
350	—	320	—	C13	ESE
400	—	350	—	C13	ESE
450	—	410	—	C15	ESE
500	—	455	—	C15	ESE
500	—	455	—	C18	EPA Tier 4 Final
550	—	500	—	C18	ESE
600	—	545	—	C18	ESE
700	—	635	—	3412C	Low BSFC
750	—	680	—	C27	ESE, Low BSFC
750	—	680	—	3412C	Low BSFC
800	800	725	—	C27	ESE, Low BSFC
800	—	725	—	3412C	Low BSFC
1000	1000	910	830	C32	ESE, Low BSFC
1100	1100	1000	890	3512	Low BSFC
1100	1100	1000	—	C32	ESE, Low BSFC
1250	1250	1135	—	C32	ESE, Low BSFC
1250	1250	1135	1010	3512	Low BSFC
1400	1400	1275	—	3512B	Low BSFC, Low Emissions
1500	1500	1360	1230	3512B	Low BSFC, Low Emissions
1500	1500	1360	1230	3512C	ESE
1750	1750	1600	—	3512C	ESE
1750	1750	1600	1450	3516	Low BSFC
2000	2000	1825	1640	3516B	Low BSFC, Low Emissions
—	—	1825	1640	3516B DGB	Low BSFC
2000	2000	1825	1650	3516C	EPA Tier 4 Final, ESE
2250	2250	2000	—	3516B	Low BSFC
2500	2500	2250	2050	3516C	EPA Tier 4 Final, ESE
2750	2750	2500	—	3516E	ESE
3000	3000	2725	2500	C175-16	EPA Tier 4 Final, ESE, Low BSFC
3900	3900	3500	3150	C175-20	ESE, Low BSFC
4000*	4000*	3600*	3250*	C175-20	ESE, Low BSFC

ESE = "EPA Stationary Emergency". *Rating does not include package mounted radiator.

60 Hz — POWER PLANTS

DIESEL RATINGS, 1525 – 5320 ekW

ekW			Generator Set Model	Configuration
Standby	Prime	Continuous		
900 rpm				
2000	1820	1650	3606	Low BSFC
2660	2420	2200	3608	Low BSFC
—	2420	2200	C280-8*	EPA Tier 4 Final
4000	3640	3300	3612	Low BSFC
—	3640	3300	C280-12*	EPA Tier 4 Final
5320	4840	4400	3616	Low BSFC
—	4840	4400	C280-16*	EPA Tier 4 Final
720 rpm				
—	1525	—	3606	Low BSFC
—	2020	—	3608	Low BSFC
—	3050	—	3612	Low BSFC
—	4040	—	3616	Low BSFC

*Tier 4 Final is met using AVERAGE, BANKING, and TRADING PROGRAM.

60 Hz DIESEL / HEAVY FUEL RATINGS, 1500 – 4000 ekW

Continuous		Generator Set Model*	Configuration
ekW	bkW		
900 rpm			
1500	1570	3606	Low BSFC
2000	2090	3608	Low BSFC
3000	3140	3612	Low BSFC
4000	4180	3616	Low BSFC

*Special rating request required.

60 Hz DIESEL / HEAVY FUEL RATINGS, 985 – 4300 kWe

KWe*			Generator Set Model**	Configuration
Standby	Prime	Contin.		
900 rpm				
1000	985	985	6CM20C	World Bank Certification (Stage I and II)
1380	1310	1310	8CM20C	World Bank Certification (Stage I and II)
1500	1475	1475	9CM20C	World Bank Certification (Stage I and II)
720 rpm				
1900	1735	1735	6CM25C	World Bank Certification (Stage I and II)
2000	1940	1940	6CM25E	World Bank Certification (Stage I and II)
2500	2315	2315	8CM25C	World Bank Certification (Stage I and II)
2700	2585	2585	8CM25E	World Bank Certification (Stage I and II)
2800	2600	2600	9CM25C	World Bank Certification (Stage I and II)
3000	2910	2910	9CM25E	World Bank Certification (Stage I and II)
3400	3085	3085	6CM32E	World Bank Certification (Stage I and II)
4500	4115	4115	8CM32E	World Bank Certification (Stage I and II)
5100	4630	4630	9CM32E	World Bank Certification (Stage I and II)
5880	5880	5880	12CM32C	World Bank Certification (Stage I and II)
6500	6170	6170	12CM32E	World Bank Certification (Stage I and II)
7840	7840	7840	16CM32C	World Bank Certification (Stage I and II)
8700	8230	8230	16CM32E	World Bank Certification (Stage I and II)
600 rpm				
2800	2780	2780	6CM32C	World Bank Certification (Stage I and II)
3800	3700	3700	8CM32C	World Bank Certification (Stage I and II)
4300	4170	4170	9CM32C	World Bank Certification (Stage I and II)

*Electric output depends on final generator specification.

**For CM medium speed engines a project application request is required.

60 Hz DIESEL / HEAVY FUEL RATINGS, 5520 – 16400 kWe

KWe*			Generator Set Model**	Configuration
Standby	Prime	Contin.		
514 rpm				
6100	5520	5520	6CM43C	World Bank Certification (Stage I and II)
7100	6440	6440	7CM43C	World Bank Certification (Stage I and II)
8200	7360	7360	8CM43C	World Bank Certification (Stage I and II)
9200	8290	8290	9CM43C	World Bank Certification (Stage I and II)
12300	11170	11170	12CM43C	World Bank Certification (Stage I and II)
16400	14890	14890	16CM43C	World Bank Certification (Stage I and II)

*Electric output depends on final generator specification.

**For CM medium speed engines a project application request is required.

60 Hz DIESEL / DUAL FUEL RATINGS, 5290 – 15100 kWe

KWe*			Generator Set Model**	Configuration
Standby	Prime	Contin.		
514 rpm				
5600	5290	5290	6CM46DF	World Bank Certification (Stage I and II)
6600	6170	6170	7CM46DF	World Bank Certification (Stage I and II)
7500	7050	7050	8CM46DF	World Bank Certification (Stage I and II)
8500	7930	7930	9CM46DF	World Bank Certification (Stage I and II)
11300	10580	10580	12CM46DF	World Bank Certification (Stage I and II)
15100	14110	14110	16CM46DF	World Bank Certification (Stage I and II)

*Electric output depends on final generator specification.

**For CM medium speed engines a project application request is required.

50 Hz RENTAL POWER RATINGS, 30 – 2000 kVA

kVA			Generator Set Model	Configuration
Standby	Prime	Continuous		
1500 rpm				
33	30	—	XQP30	EU Stage IIIA and Low BSFC
65	60	—	XQP60	EU Stage IIIA and Low BSFC
110	100	—	XQP100	EU Stage IIIA and Low BSFC
165	150	—	XQP150	EU Stage IIIA and Low BSFC
300	275	—	XQP275	EU Stage IIIA
330	300	—	XQP300	Low BSFC
550	500	—	XQP500	EU Stage IIIA and Low BSFC
1210	1100	—	XQP1100	Low BSFC
—	—	1438	XQC1200	Low BSFC/Low Emissions
—	—	1893	XQC1600	Low BSFC/Low Emissions
—	2000	1750	XQ2000 DGB™	Low BSFC



60 Hz RENTAL POWER RATINGS, 28 – 1705 ekW AND 34 – 625 kVA

ekW			Generator Set Model	Configuration
Standby	Prime	Continuous		
1800 rpm				
31	28	—	XQP30	Low BSFC
60	55	—	XQP60	Low BSFC
88	80	—	XQP100	Low BSFC
149	135	—	XQP150	Low BSFC
302	275	—	XQP300	Low BSFC
460	420	—	XQP500	Low BSFC
1067	970	—	XQP1100	Low BSFC
—	—	1260	XQC1200	Low BSFC, Low Emissions
—	—	1705	XQC1600	Low BSFC, Low Emissions
kVA			Generator Set Model	Configuration
Standby	Prime	Continuous		
1800 rpm				
38	34	—	XQ35	EPA Tier 4 Final
—	59	—	XQ60	EPA Tier 4 Final
138	125	—	XQ125	EPA Tier 4 Final
250	225	—	XQ230	EPA Tier 4 Final
469	425	—	XQ425	EPA Tier 4 Final
625	568	—	XQ570	EPA Tier 4 Final

DIESEL RATING DEFINITIONS

Standby Power

Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

Mission Critical

Output available with varying load for the duration of the interruption of the normal source power. Average power output is 85% of the mission critical power rating. Typical peak demand up to 100% of rated power for up to 5% of the operating time. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.


Prime Power

Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand of 100% of prime-rated ekW with 10% of overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

Continuous Power

Output available without varying load for an unlimited time. Average power output is 70 – 100% of the continuous power rating. Typical peak demand is 100% of continuous rated ekW for 100% of operating hours.

GAS GENERATOR SETS

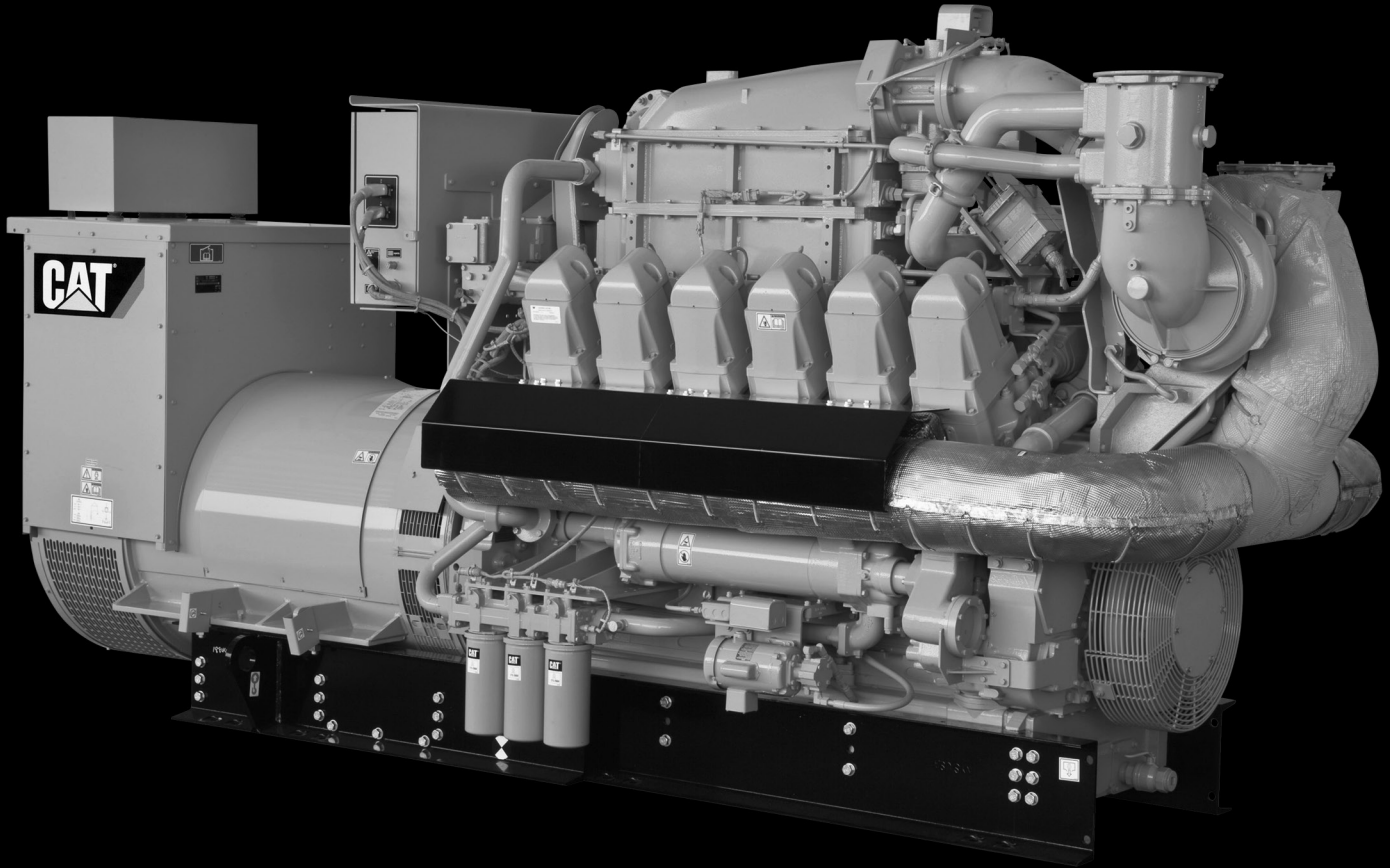

G3512E

50 Hz CONTINUOUS – GAS RATINGS, 107 – 4500 ekW

eKW	Natural Gas	Biogas
	1500 rpm	
107	—	G3406
166	—	G3406
174	—	G3412
374	G3412C	—
400	CG132-8	CG132-8
400	CG132B-8	CG132B-8
600	CG132-12	CG132-12
600	CG132B-12	CG132B-12
800	CG132-16	CG132-16
800	CG132B-16	CG132B-16
983	G3516	—
1000	CG170-12	CG170-12
1016	G3512E	—
1041	—	G3516
1088	G3516B	—
1105	—	G3516+
1125	CG170-12	—
1200	CG170-12	CG170-12
1211	G3512E	—
1500	G3512H	—
1500	CG170-16	—
1560	CG170-16	CG170-16
1603	G3516E	—
1603	G3516C	—
1976	G3520C	—
1984	—	G3520C
2000	CG170-20	CG170-20
2010	G3520C	—
2022	G3516H	—
2039	G3520E	—
2519	G3520H	—
	1000 rpm	
3333	CG260-12	—
3770	—	CG260-16
4300	CG260-16	—
4500	CG260-16	—


*All ratings at 0.8 pf.

50 Hz GAS / DUAL FUEL RATINGS, 6580 – 15100 kWe

KWe*			Generator Set Model**	Configuration
Standby	Prime	Contin.		
750 rpm				
6580	6580	6580	G16CM34	World Bank Certification (Stage I and II)
10300	10300	10300	G20CM34	World Bank Certification (Stage I and II)
500 rpm				
5600	5290	5290	6CM46DF	World Bank Certification (Stage I and II)
6600	6170	6170	7CM46DF	World Bank Certification (Stage I and II)
7500	7050	7050	8CM46DF	World Bank Certification (Stage I and II)
8500	7930	7930	9CM46DF	World Bank Certification (Stage I and II)
11300	10580	10580	12CM46DF	World Bank Certification (Stage I and II)
15100	14110	14110	16CM46DF	World Bank Certification (Stage I and II)

*Electric output depends on final generator specification.

**For CM medium speed engines a project application request is required.

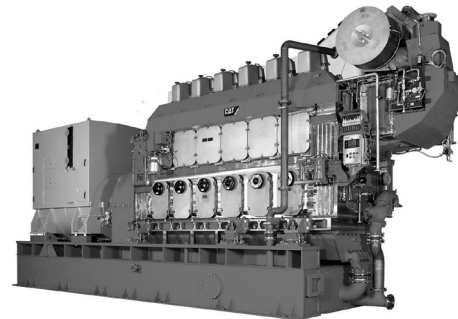

60 Hz NATURAL GAS RATINGS, 30 – 150 ekW

Available only for North America.

ekW Standby	Generator Set	Engine	Configuration
	Model		
Single Phase Output* 1800 rpm			
50	DG50-2S	5.7	ESE
50	DG50-4S	5.7	SCAQMD
60	DG60-2S	5.7	ESE
60	DG60-4S	5.7	SCAQMD
80	DG80-2S	5.7	ESE
100	DG100-2S	5.7	ESE
Three Phase Output* 1800 rpm			
50	DG50-2	5.7	ESE
50	DG50-4	5.7	SCAQMD
60	DG60-2	5.7	ESE
60	DG60-4	5.7	SCAQMD
80	DG80-2	5.7	ESE
100	DG100-2	5.7	ESE
125	DG125-2	8.8	ESE
150	DG150-2	8.8	ESE
175	DG175-2 GC	14.2	ESE
200	DG200-2 GC	14.2	ESE
230	DG230-2 GC	14.2	ESE
250	DG250-2 GC	14.2	ESE
275	DG275-2 GC	14.2	ESE
300	DG300-2 GC	14.2	ESE
350	DG350-2 GC	21.9	ESE
400	DG400-2 GC	21.9	ESE
450	DG450-2 GC	21.9	ESE

*All ratings at 1.0 pf.

*All ratings at 0.8 pf.

ESE = "EPA Stationary Emergency".

SCAQMD = "South Coast Air Quality Management District".

50 Hz NATURAL GAS RATINGS, 158 – 400 kVA

kVA		Generator Set Model	Engine	Configuration
Standby	Prime			
Three Phase Output* 1500 rpm				
175	158	DG175-1 GC	14.2	–
200	180	DG200-1 GC	14.2	–
230	207	DG230-1 GC	14.2	–
250	225	DG250-1 GC	14.2	–
275	248	DG275-1 GC	14.2	–
300	270	DG300-1 GC	14.2	–
350	315	DG350-1 GC	21.9	–
400	360	DG400-1 GC	21.9	–

*All ratings at 0.8 pf.

60 Hz NATURAL GAS RATINGS, 158 – 450 ekW

ekW		Generator Set Model	Engine	Configuration
Standby	Prime			
Three Phase Output* 1800 rpm				
175	158	DG175-1 GC	14.2	–
200	180	DG200-1 GC	14.2	–
230	207	DG230-1 GC	14.2	–
250	225	DG250-1 GC	14.2	–
275	248	DG275-1 GC	14.2	–
300	270	DG300-1 GC	14.2	–
350	315	DG350-1 GC	21.9	–
400	360	DG400-1 GC	21.9	–
450	405	DG450-1 GC	21.9	–

*All ratings at 0.8 pf.

60 Hz PROPANE GAS RATINGS, 30 – 140 ekW

Available only for North America.

ekW	Generator Set	Engine	Configuration
Standby	Model		
Single Phase Output* 1800 rpm			
30	DG30-2S	3.0	ESE
30	DG30-4S	3.0	SCAQMD
50	DG50-2S	5.7	ESE
50	DG50-4S	5.7	SCAQMD
60	DG60-2S	5.7	ESE
60	DG60-4S	5.7	SCAQMD
90	DG100-2S	5.7	ESE
Three Phase Output* 1800 rpm			
30	DG30-2	3.0	ESE
30	DG30-4	3.0	SCAQMD
50	DG50-2	5.7	ESE
50	DG50-4	5.7	SCAQMD
60	DG60-2	5.7	ESE
60	DG60-4	5.7	SCAQMD
92	DG100-2	5.7	ESE
140	DG100-4	8.8	ESE

*All ratings at 1.0 pf.

*All ratings at 0.8 pf.

ESE = "EPA Stationary Emergency".

SCAQMD = "South Coast Air Quality Management District".

60 Hz STANDBY GAS RATINGS, 150 – 2000 ekW

Available only for North America.

ekW	Natural Gas
1800 rpm*	
150	G3406
230	G3406
350	G3412
423	G3412C
500	G3412C
750	G3512**
1000	G3512**
1500	G3516C
2000	G3520C

*All ratings at 1.0 pf.

**EPA Certified Rating Available for Emergency Applications within the US.

50 – 60 Hz GAS RENTAL POWER RATINGS, 135 – 1900 ekW

ekW	Generator Set	Configuration
Continuous	Model	
1800 rpm		
135	XG135	Factory certified US EPA Nonroad and Stationary SI Engine
400	XG400	Factory certified US EPA Nonroad SI Engine
1500 – 1800 rpm		
1475	XQ1475	US EPA NSPS SI Capable
1500 rpm		
1900	XGC1900	-

60 Hz CONTINUOUS – GAS RATINGS, 137 – 4050 ekW

ekW	Natural Gas	Biogas
	1800 rpm	
137	—	G3406
155	G3406	—
194	—	G3412
217	G3406	—
253	G3412	—
400	CG132-8	CG132-8
400	CG132B-8	CG132B-8
403	G3412	—
453	G3412C	—
600	CG132-12	CG132-12
600	CG132B-12	CG132B-12
800	CG132-16	CG132-16
800	CG132B-16	CG132B-16
1300	G3516	—
1663	G3516C	—
2077	G3520C	—
1500 rpm		
1000	—	G3516+
1125	CG170-12	—
1200	CG170-12	CG170-12
1500	CG170-16	—
1560	CG170-16	CG170-16
1936	—	G3520C
2000	CG170-20	CG170-20
2008	G3516H	—
2026	G3520E	—
2500	G3520H	—
1200 rpm		
824	—	G3516
1000	—	G3516+
1626	—	G3520C
900 rpm		
3000	CG260-12	—
3510	—	CG260-16
4000	CG260-16	—
4050	CG260-16	—

60 Hz GAS / DUAL FUEL RATINGS, 6580 – 15100 kWe

KWe*			Generator Set Model**	Configuration
Standby	Prime	Contin.		
720 rpm				
6580	6580	6580	G16CM34	World Bank Certification (Stage I and II)
9800	9800	9800	G20CM34	World Bank Certification (Stage I and II)
514 rpm				
5600	5290	5600	6CM46DF	World Bank Certification (Stage I and II)
6600	6170	6600	7CM46DF	World Bank Certification (Stage I and II)
7500	7050	7500	8CM46DF	World Bank Certification (Stage I and II)
8500	7930	8500	9CM46DF	World Bank Certification (Stage I and II)
11300	10580	11300	12CM46DF	World Bank Certification (Stage I and II)
15100	14110	15100	16CM46DF	World Bank Certification (Stage I and II)

*Electric output depends on final generator specification.

**For CM medium speed engines a project application request is required.

GAS RATING DEFINITIONS

Standby Power Rating

Output available with varying load for the duration of an emergency outage. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

Prime Power

Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand of 100% of prime-rated ekW with 10% of overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

Continuous Power Rating

Output available with non-varying load for an unlimited time. Average power output is 70-100% of the continuous power rating. Typical peak demand is 100% of continuous rated ekW for 100% of operating hours.

RENEWABLE ENERGY PRODUCTS



Photovoltaic (PV) Module

Model	Power Output	Type
PVT115	115 watt per panel	Thin Film
PVT117	117.5 watt per panel	Thin Film

Inverter Options – UL Listed

Output	Voltage	Frequency
50 kW	480V, 3 Phase	60 Hz
30 kW	480V, 3 Phase	60 Hz
24 kW	480V, 3 Phase	60 Hz
20 kW	480V, 3 Phase	60 Hz
15 kW	480V, 3 Phase	60 Hz
12 kW	480V, 3 Phase	60 Hz
7.7 kW	208V – 240V, 1 Phase	60 Hz
7 kW	208V – 240V, 1 Phase	60 Hz
6 kW	208V – 240V, 1 Phase	60 Hz
5 kW	208V – 240V, 1 Phase	60 Hz
3.8 kW	208V – 240V, 1 Phase	60 Hz
3 kW	208V – 240V, 1 Phase	60 Hz

Inverter Options – CE Mark

Output	Voltage	Frequency
50 kW	400V, 3 Phase	50 – 60 Hz
25 kW	380V – 415V, 3 Phase	50 – 60 Hz
20 kW	380V – 415V, 3 Phase	50 – 60 Hz
15 kW	380V – 415V, 3 Phase	50 – 60 Hz
12 kW	380V – 415V, 3 Phase	50 – 60 Hz
10 kW	380V – 415V, 3 Phase	50 – 60 Hz
9 kW	380V – 415V, 3 Phase	50 – 60 Hz
8 kW	380V – 415V, 3 Phase	50 – 60 Hz
7 kW	380V – 415V, 3 Phase	50 – 60 Hz
6 kW	380V – 415V, 3 Phase	50 – 60 Hz
5 kW	380V – 415V, 3 Phase	50 – 60 Hz
5 kW	220V – 240V, 1 Phase	50 – 60 Hz
4 kW	220V – 240V, 1 Phase	50 – 60 Hz
3.6 kW	220V – 240V, 1 Phase	50 – 60 Hz
3 kW	220V – 240V, 1 Phase	50 – 60 Hz

Inverter Options – Domestic China

Output	Voltage	Frequency
40 kW	380V – 415V, 3 Phase	50 Hz
33 kW	380V – 415V, 3 Phase	50 Hz
20 kW	380V – 415V, 3 Phase	50 Hz
17 kW	380V – 415V, 3 Phase	50 Hz
15 kW	380V – 415V, 3 Phase	50 Hz
10 kW	380V – 415V, 3 Phase	50 Hz
8 kW	380V – 415V, 3 Phase	50 Hz
6 kW	380V – 415V, 3 Phase	50 Hz
5 kW	380V – 415V, 3 Phase	50 Hz
4 kW	380V – 415V, 3 Phase	50 Hz
3 kW	380V – 415V, 3 Phase	50 Hz
5 kW	220V – 240V, 1 Phase	50 Hz
3 kW	220V – 240V, 1 Phase	50 Hz



ENERGY STORAGE SYSTEMS

Grid Stability Modules

Grid Stability modules provide a pre-engineered solution to energy storage needs. The modules integrate with diesel or gas generator sets, photovoltaic (PV), or other renewable systems to provide short duration power. The module holds closely regulated system voltage and frequency during periods of rapid load addition or removal, or during periods of intermittent output from the renewables.

Model	1 Minute Output	30 Minute Output
PGS375	375 kW	250 kW
PGS750	750 kW	500 kW
PGS860	860 kW	500 kW
PGS1125	1125 kW	750 kW
PGS1290	1290 kW	750 kW
PGS1875	1875 kW	1250 kW

Energy Time Shift Module

Energy Time Shift modules provide a pre-engineered solution to energy storage needs. The scalable system integrates with photovoltaic (PV) or other renewable systems to store energy from renewables, generator sets, or the grid for use at a later time.

Model	Rated Power	Discharge Time
ES287H250	250 kW	1 hour
ES1.0H250 MW	250 kW	4 hour
ES1.8H250 MW	250 kW	7.2 hour
ES2.3H250 MW	250 kW	10 hour
ES1.2H1.0 MW	1000 kW	1 hour

MICROGRID MASTER CONTROLLER (MMC)

MMC-S

The MMC-S is designed for residential and small business installations. It integrates the photovoltaic (PV) system, generator set, and energy storage system to provide renewable capacity penetration up to 60%.

MMC-M

The MMC-M is designed for industrial and small community installation. It integrates with the photovoltaic (PV) system, generator set, and energy storage system to provide renewable capacity penetration of greater than 60%. The MMC-M provides black start capability and performs load management functions.

MMC-L

The MMC-L is designed for large industrial, campus, and distributed resource installations. It integrates with the photovoltaic (PV) system, generator set, and energy storage system to provide renewable capacity penetration of greater than 60%. The MMC-L can control distributed assets and provides black start capability and load management functions.



HOME AND OUTDOOR POWER PRODUCTS



GASOLINE

50 Hz

50 Hz 3000 rpm

UK and EU*

Model	Engine cc	Rated Watts (Prime)	Maximum Watts (Standby)	Output Volts
INV2000	80 OHV	1800	2000	230V
RP2500	212 OHV	2300	2500	115V – 230V
RP3100	212 OHV	2800	3100	115V – 230V
RP4400	300 OHV	4000	4400	115V – 230V

All models are CE compliant.

*EU models are 230 volt only.

All ratings are Single Phase at 1.0 pf.

GASOLINE

60 Hz

60 Hz 3600 rpm

USA and Canada

Model	Engine cc	Running Watts	Starting Watts	Output Volts
INV2000	80 OHV	1800	2250	120V
RP3600	212 OHV	3600	4500	120V
RP5500	300 OHV	5500	6875	120V – 240V
RP6500E	420 OHV	6500	8125	120V – 240V
RP7500E	420 OHV	7500	9375	120V – 240V
RP12000E	670 OHV Twin	12000	15000	120V – 240V

EPA, CARB and CSA compliant models are available.

All ratings are Single Phase at 1.0 pf.



Further information available at: cat.com/portablepower

Further information available at: cat.com/portablepower

EMCP 4



EMCP 4

EMCP 4.1

The EMCP 4.1 provides basic engine controls – stop/run/auto push button controls, cycle crank, and cool down timer. The 3.8 inch graphical display supports multiple languages, including character languages such as Chinese, Arabic, Russian, and Japanese. The EMCP 4.1 provides monitoring of generator electrical output, including AC voltage, current, frequency, and mechanical information such as oil pressure, coolant temperature, engine speed, and battery voltage along with fuel level if a sensor is provided. It also provides a number of protective functions, such as warnings and shutdowns for over/under voltage, over/under frequency, low oil pressure, high coolant temperature, low coolant level, failure to start, and overspeed.

EMCP 4.2

The EMCP 4.2 builds on the features of the EMCP 4.1 controller, offering expanded engine monitoring based on information available from the engine ECM, along with expanded generator set protection and monitoring, such as generator kW, kVA, and kWh.

Flexibility is also increased with the addition of a modbus RTU communication port, remote annunciator modules, and expansion I/O modules to allow the EMCP 4 system to be configured to meet site specific design requirements.

With the additional monitoring and expansion modules available, the EMCP 4.2 is designed to provide control and protection for critical installations, such as NFPA-110 Level 1 applications.

EMCP 4.2B

The EMCP 4.2B adds advanced features to the EMCP 4.2 controller, offering expanded generator set protection and monitoring, such as additional overcurrent protection curve selection, real (kW) load histogram, trip kWh and trip kVAh. Display screens are configurable for customer desired parameters.

An integrated basic programmable logic control (PLC) function to read controller inputs and drive controller outputs is also provided with the EMCP 4.2B.

EMCP 4.3

The EMCP 4.3 further expands the EMCP 4 product line with the addition of 5.5 inch graphical display and additional context specific navigation keys.

With the addition of a Modbus TCP port, the EMCP 4.3 controller can be easily integrated into complex systems requiring complete generator set monitoring.

EMCP 4.4

The EMCP 4.4 builds on the EMCP 4.3 functionality with the addition of fully automatic multi generator set paralleling. The EMCP 4.4 provides all of the functions required to automatically parallel generator sets, including dead bus arbitration, automatic or manual modes of operation, and load sharing (real and reactive). Optional provisions allow for extended parallel operation of a single generator with Utility for Base Load/Import/Export capability.

SYSTEMS PRODUCTS



CAT

NEMA TYPE 1
ENCLOSURE
INDOOR USE ONLY

INTERNAL
BOM PREFIX

SPACE

⚠ DANGER
HIGH VOLTAGE
ELECTRICITY
SHOCK HAZARD
SEE INSTRUCTIONS
FOR SAFETY PRECAUTIONS

TOUCH
TOUCH TO LOCK

TAP BOX

TEST PANEL
SERIAL NUMBER

⚠ DANGER

TEST PANEL
SERIAL NUMBER

⚠ DANGER
HIGH VOLTAGE
ELECTRICITY
SHOCK HAZARD
SEE INSTRUCTIONS
FOR SAFETY PRECAUTIONS

⚠ DANGER
HIGH VOLTAGE
ELECTRICITY
SHOCK HAZARD
SEE INSTRUCTIONS
FOR SAFETY PRECAUTIONS

PARALLELING PRODUCTS

Description	EMCP 4.4		EMCP4.4 + System Master	EXL	EPIC	EGIS	Custom Switchgear
	On Package Generator to Generator Paralleling	Single Generator to Utility Paralleling	Generator Group to Utility Paralleling with System Master HMI	Single Generator to Utility Paralleling with Optional Switchgear	Modular Control Panels Ideal for Adding Additional Generation Capacity	Modular Configurable Controls and Switchgear with Standardized Sequence of Operations	Design to Order Switchgear with Customizable Sequence of Operations
Operating Modes							
Emergency Standby / Island Mode	X	X	X	X	X	X	X
Utility Paralleling	-	X	X	X	X	X	X
System Capacity							
Number of Units	≤16	1	≤8	1	≤12	≤12	Unlimited
Voltages							
Low Voltage (≤ 600V)	X	X	X	X	X	X	X
Medium Voltage (601-27 kV)	<5	X	<15	X	X	-	X
Generator Paralleling Functions							
Dead Bus Arbitration	X	X	X	X	X	X	X
Synchronization	X	X	X	X	X	X	X
Load Sharing	X	-	X	-	X	X	X
Load Shed / Add	X	X	X	-	X	X	X
Load Sense / Load Demand	X	-	X	-	X	X	X
Utility Paralleling Functions							
Load Management / Peak Shaving	-	X	X	X	X	X	X
Utility Transfer Control	-	X	X	X	X	X	X
Utility Protective Relay	-	-	-	X	-	X	X

SYSTEMS PRODUCTS

ATS

Amp Rating	Poles	Model	Type
40 – 4000	2,3,4	MX	Contactior
40 – 1600	2,3,4	ATC	Contactior
30 – 1000	2,3,4	ATC	MCCB & MCS
200 – 5000	2,3,4	ATC	Power Breaker

Operating Modes:
 Open Transition
 Closed Transition
 Delayed Transition
 Bypass Isolation




SYSTEMS PRODUCTS

UPS BYPASS SWITCHES

UPS kVA	Max Continuous Amps	Max AIC	Configuration	Operation	UPS Bypass Mode Interlock	Model
300 – 600	800	65k	Wall Mount	Manual	Solenoid Kirk-Keys	9088
300 – 1200	1600	65k	Free Standing	Manual	Solenoid Kirk-Keys	9082
300 – 200	1600	65k	Free Standing	Manually Initiated Automatic	Electronic	UBP

Listed to UL891
 Fixed Mount
 Consult Dealer for Parallel Applications

REFERENCE GUIDE

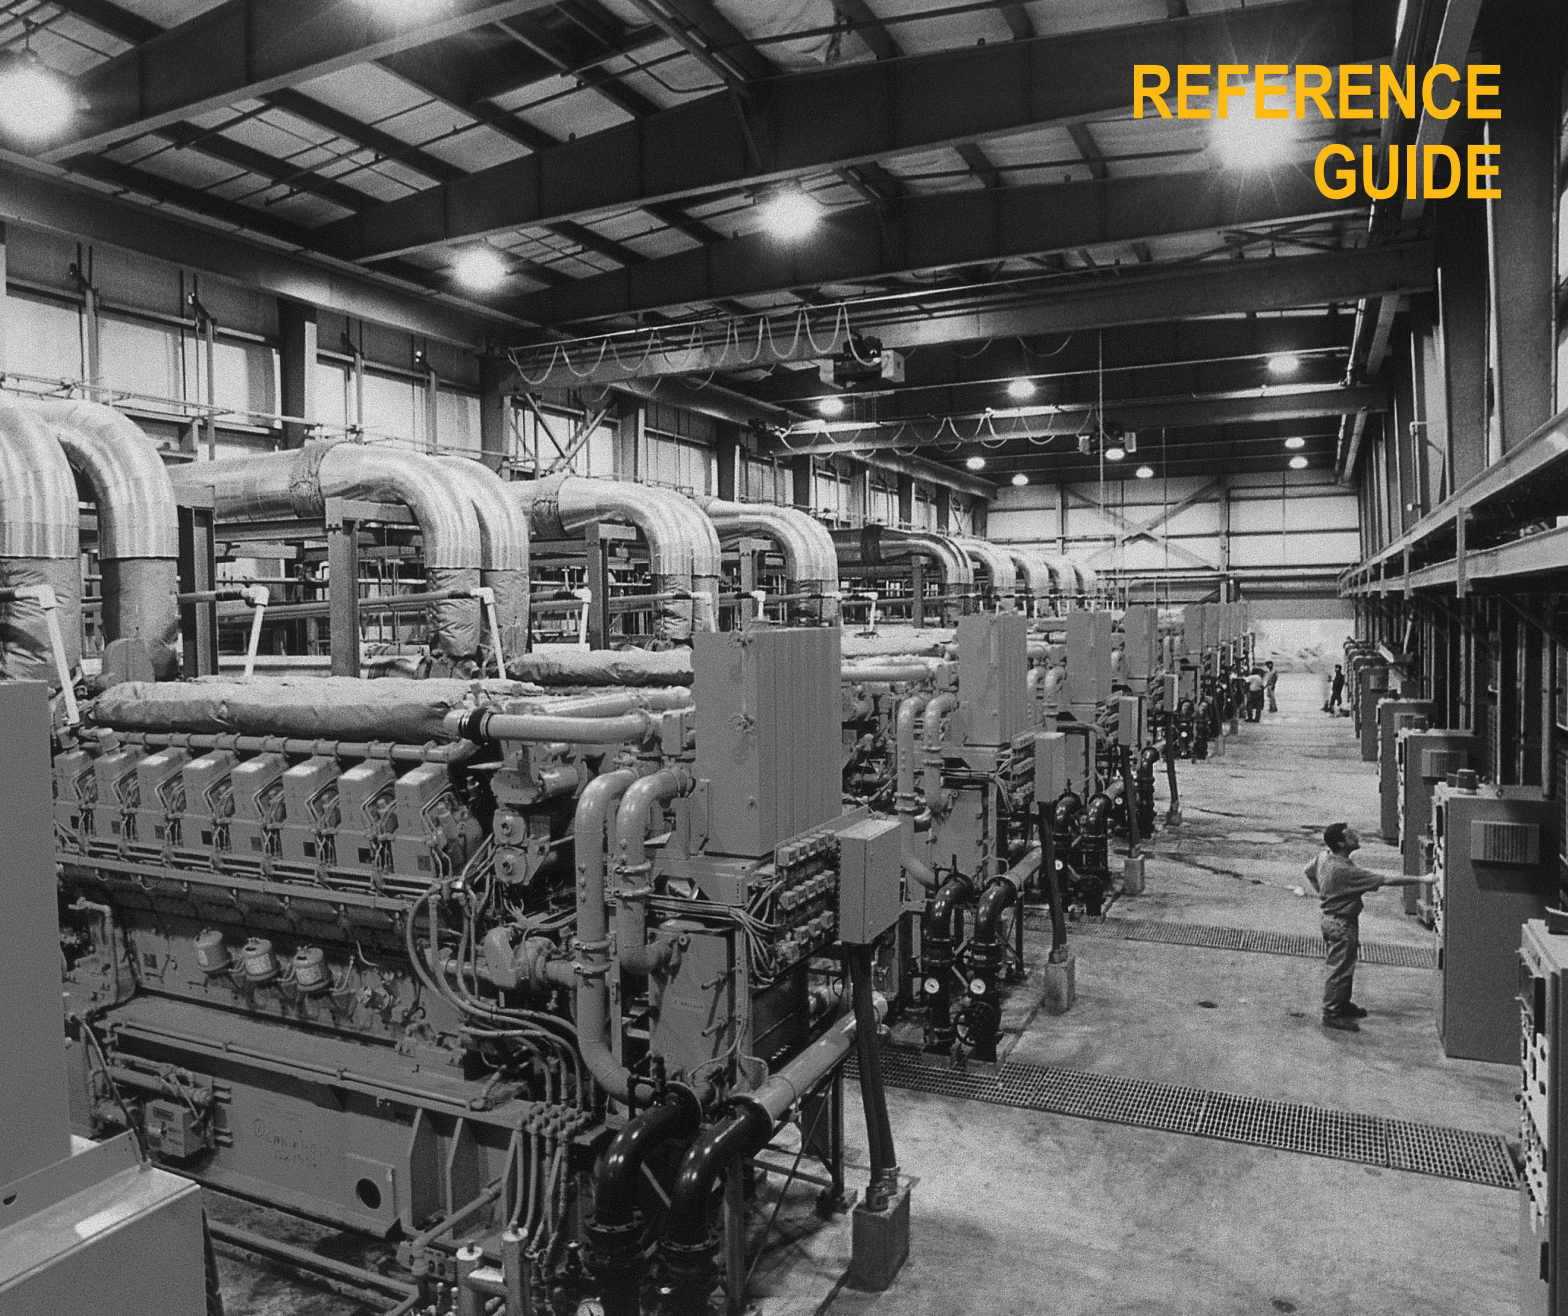

FUEL SYSTEM – DIESEL

Day Tank Sizing

$$\text{Tank Size (gal)} = \frac{\text{Rated BSFC (lb/hp}\cdot\text{hr)}}{7.076 \text{ (lb/gal)}} \times \text{Rated HP} \times \text{Load Factor}$$

x Hours Between Refilling
+ Reserve Requirement

OR

Rule of Thumb for tank size with 25% reserve

$$0.056 \times \text{Ave. BHP demand} \times \text{Hours between refills} \times 1.25 = \text{_____gal.}$$

$$0.27 \times \text{Ave. BkW demand} \times \text{Hours between refills} \times 1.25 = \text{_____liters.}$$

Note: Additional tank capacity required for cooling of recirculated fuel in unit-injected engines. Tank should be located below level of injectors or nozzles.

On-Site Power Requirements

Based on 100,000 sq ft. of office building, etc. and 40°N. Latitudes

- Electric Requirements
 - 600 kW continuous load
 - (Air conditioning is absorption)
 - Use three – 300 kW units
 - (2 prime and 1 standby)
- Air Conditioning and Compressor
 - 400 tons prime load
 - Use two – 200 hp engines
 - (No Standby)

Refrigeration

- One ton refrigeration = 200 Btu/min = 12,000 Btu/h
- One Boiler hp = 33,475 Btu/h
- One ton compressor rating = One engine hp
- Auxiliary air conditioning equipment requires 1/4 hp/ton of compressor rating

Ice Plant

- Complete power requires 4-5 hp per daily ton capacity

Air Compressor

- hp = 1/4 x cu ft m/min at 100 psi
- Increase bhp 10% for 125 psi
- Decrease bhp 10% for 80 psi

ELECTRICAL TABLES





To Obtain	Alternating Current		Direct Current
	Single-Phase	Three-Phase	
kW	$\frac{V \times I \times P.F.}{1000}$	$\frac{1.732 \times V \times I \times P.F.}{1000}$	$\frac{V \times I}{1000}$
kVA	$\frac{V \times I}{1000}$	$\frac{1.732 \times V \times I}{1000}$	–
Horsepower required when kW known (Generator)	$\frac{\text{kW}}{.746 \times \text{EFF. (Gen)}}$	$\frac{\text{kW}}{.746 \times \text{EFF. (Gen)}}$	$\frac{\text{kW}}{.746 \times \text{EFF. (Gen)}}$
kW input when HP known (Motor)	$\frac{\text{HP} \times .746}{\text{EFF. (Mot.)}}$	$\frac{\text{HP} \times .746}{\text{EFF. (Mot.)}}$	$\frac{\text{HP} \times .746}{\text{EFF. (Mot.)}}$
Amperes when HP known	$\frac{\text{HP} \times .746}{V \times P.F. \times \text{EFF.}}$	$\frac{\text{HP} \times .746}{1.732 \times V \times \text{EFF.} \times P.F.}$	$\frac{\text{HP} \times .746}{V \times \text{EFF.}}$
Amperes when kW known	$\frac{\text{kW} \times 1000}{V \times P.F.}$	$\frac{\text{kW} \times 1000}{1.732 \times V \times P.F.}$	$\frac{\text{kW} \times 1000}{V}$
Amperes when kVA known	$\frac{\text{kVA} \times 1000}{V}$	$\frac{\text{kVA} \times 1000}{1.732 \times V}$	–
Frequency Hz	$\frac{\text{Poles} \times \text{RPM}}{120}$	$\frac{\text{Poles} \times \text{RPM}}{120}$	–
Reactive kVA (kVAr)	$\frac{V \times I \times \sqrt{1-(P.F.)^2}}{1000}$	$\frac{1.732 \times V \times I \times \sqrt{1-(P.F.)^2}}{1000}$	–
% Voltage Regulation	$\frac{100(V_{NL}-V_{FL})}{V_{FL}}$	$\frac{100(V_{NL}-V_{FL})}{V_{FL}}$	$\frac{100(V_{NL}-V_{FL})}{V_{FL}}$

ELECTRICAL TABLE ABBREVIATIONS:

V – voltage in volts
I – current in amperes
kW – power in kilowatts (actual power)
kVA – kilovolt-amperes (apparent power)
HP – horsepower
RPM – revolutions per minute

kVAr – reactive kilovolt-amperes
EFF. – efficiency as a decimal factor
NL – no load
FL – full load
P.F. – power factor
Note: DC kW = DC kVA

THREE-PHASE CONNECTION SYSTEMS

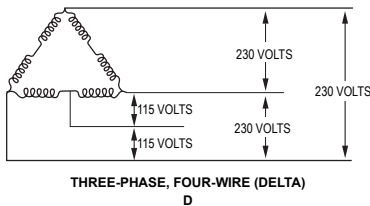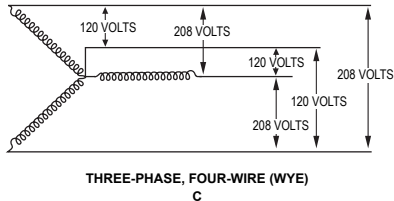

REDUCED VOLTAGE STARTERS


Type of Starter	Motor Voltage (% Line Voltage)	Line Current (% Full Voltage) Starting Current	Starting Torque (% of Full Voltage) Starting Torque
Full Voltage Starter	100	100	100
Auto Transformer	<ul style="list-style-type: none"> • 80% Tap • 65% Tap • 50% Tap 	<ul style="list-style-type: none"> 68 46 30 	<ul style="list-style-type: none"> 64 42 25
Resistor Starter Single Step (adjusted for motor voltage to be 80% of line voltage)	80	80	64
Reactor	<ul style="list-style-type: none"> • 50% Tap • 45% Tap • 37.5% Tap 	<ul style="list-style-type: none"> 50 45 37.5 	<ul style="list-style-type: none"> 25 20 14
Part Winding (low- speed motors only)	<ul style="list-style-type: none"> • 75% Winding • 80% Winding 	<ul style="list-style-type: none"> 75 50 	<ul style="list-style-type: none"> 75 50

COMPARISON OF REDUCED VOLTAGE STARTING METHODS

Characteristic	Autotransformer	Primary Resistor	Reactor	Two-Step Part Winding
Starting Line Current at Same Motor Terminal Voltage	Least	— More than autotransformer type —		
Starting Power Factor	Low	High*	Low	Low
Power Draw from Line During Starting	Low	— More than autotransformer type —		
Torque	Increased slightly with speed	Increases rapidly with speed		Increases slightly with speed
Smoothness of Acceleration	Motor momentarily disconnected from line from start to run	Smooth transfer made with little change in motor terminal voltage		Smooth
Relative Cost	Average	Lower in small size – otherwise equal	Average	Less than others
Ease of Control	Same	Same	Same	No provision for adjustment of starting current
Maintenance	Same	Same	Same	Less than others
Line Disturbance	— Varies with conditions and type of load —			More than others

*Resistor starting adds considerable kW load to generator set. Total power required includes the motor kW and the kW which is lost as heat in the resistor. The series resistors account for a higher than normal starting power factor.

ENGINE ROOM VENTILATION

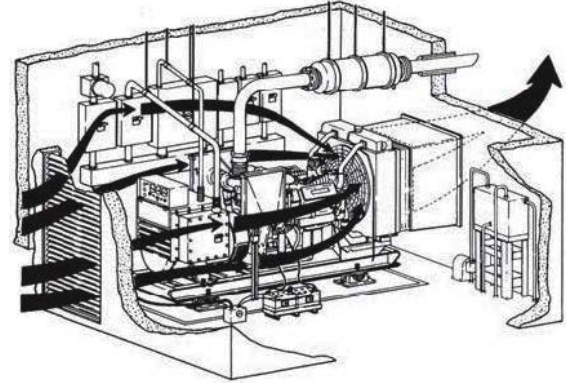

Engine room ventilation can be estimated by the following formulas, assuming 100°F (38°C) ambient air temperature:

$$V \text{ (cfm)} = \frac{H}{0.070 \times 0.24 \times \Delta T} + \text{Engine Combustion Air}$$

$$V \text{ (m}^3\text{/min)} = \frac{H}{1.099 \times 0.017 \times \Delta T} + \text{Engine Combustion Air}$$

V = Ventilation air (cfm) (m³/min).

H = Heat radiation (Btu/min) (kW).

ΔT = Permissible temperature rise in engine room (°F) (°C).

Density of air at 100°F = 0.070 lb/cu ft (1.099 kg/m³).

Specific heat of air = 0.24 Btu/°F (0.017 kW/°C).

CONVERSION FACTORS

Temperature Conversion

$$^{\circ}\text{F} = (1.8 \times ^{\circ}\text{C}) + 32$$

$$^{\circ}\text{C} = 0.5555 (^{\circ}\text{F} - 32)$$

Angle

$$1 \text{ quadrant} = 90 \text{ degrees}$$

$$1 \text{ quadrant} = 1.57 \text{ radians}$$

$$1 \text{ radian} = 57.3 \text{ degrees}$$

$$1 \text{ degree} = 60 \text{ minutes}$$

$$1 \text{ minute} = 2.9 \times 10 \text{ radians}$$

Identifying Code Letters on AC Motors	
NEMA Code Letter	Starting skVA/hp
A	0.00 – 3.14
B	3.15 – 3.54
C	3.55 – 3.99
D	4.00 – 4.49
E	4.50 – 4.99
F	5.00 – 5.59
G	5.60 – 6.29
H	6.30 – 7.09
J	7.10 – 7.99
K	8.00 – 8.99
L	9.00 – 9.99
M	10.00 – 11.19
N	11.20 – 12.49
P	12.50 – 13.99
R	14.00 – 15.99
S	16.00 – 17.99
T	18.00 – 19.99
U	20.00 – 22.39
V	22.40

Note: Code letters apply to motors up to 200 HP.

PRODUCT SUPPORT DEFINITIONS

Extended Service Coverage (ESC)

Depending on the model and application, Silver, Gold, Platinum and Platinum Plus coverage levels are available from Caterpillar with terms to meet most applications, whether prime or standby.

Platinum and Platinum Plus provide additional allowances for overtime, emergency freight, rental, crane and rigging support. Please see the registration contract for details.

Equipment	Coverage Option
New Product	New ESC
Existing Product	Advantage ESC
Overhauls	OPC*

Electric Power ESC reimburses covered parts at customer list price, labor at selling rates and travel and mileage charges (less any deductibles) for covered repairs.

Available worldwide for all Cat Electric Power Products, ESC provides usual and customary parts and labor costs for covered system failures due to defects in materials and workmanship on components over the duration of the covered period.

This is a brief description of Extended Coverage. See your Cat dealer for more information. The Extended Coverage contract will govern.

*Overhaul Protection Coverage.

CUSTOMER SUPPORT AGREEMENTS

- A **Customer Support Agreement** (CSA) is an arrangement between the end user and the Cat dealer that helps lower the cost per unit of production.
- Agreements are tailored to fit your business needs and can range from simple Preventive Maintenance Kits to sophisticated Total Cost Performance Guarantees.
- Qualified Factory Trained dealer technicians assist you by maintaining your Cat Electric Power Products and driving down operating costs. Perhaps the most important feature of any CSA is flexibility.
- A **Preventive Maintenance** (PM) agreement covers specified maintenance at a fixed cost. You maintain reliability and efficiency because the maintenance is performed by highly skilled technicians at guaranteed costs, giving you the ability to budget more accurately.
- A **Total Maintenance and Repair** (TM&R) agreement covers all of the maintenance and repair costs. Instead of paying for maintenance or repairs as they are needed, you pay one flat rate to cover a broad range of parts and services.

	PM	TM&R
Detailed inspections by highly skilled technicians	✓	✓
Scheduled maintenance	✓	✓
Labor and travel costs	✓	✓
Use of genuine Cat parts, fluids and filters	✓	✓
S·O·S SM Services and interpretation	✓	✓
Component repairs	–	✓
All unscheduled repairs, including wear out, with no exclusions, limitations or deductibles	–	✓

Check with your local Cat dealer for available options with each agreement.

NOTES

For additional information or to find
your nearest dealer go to:

www.cat.com/powergeneration

LEXE7582-08 February 2018

© 2018 Caterpillar All Rights Reserved. CAT, CATERPILLAR, BUILT FOR IT, their respective logos, "Caterpillar Yellow", the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

BUILT FOR IT.™