


# PNEUMATIC PRODUCTS 900 CDA

## HEATLESS DESICCANT PRESSURE SWING AIR DRYER

### A RENTAL DRYER PACKAGE FOR THE 21ST CENTURY

- Modular and Durable Rental Package
- Easy Hook-up and Start-up
- AMLOC Energy Savings Control System
- .9 Micron Absolute Particulate Removal
- All Stainless Control Lines
- Dew Point Monitoring Option Available
- Block and Bypass for Continuous Operation
- Reliable and Proven Design
- Fail Safe Design
- Prefilter Oil Removal Rating: Less than .0014 PPMW Oil

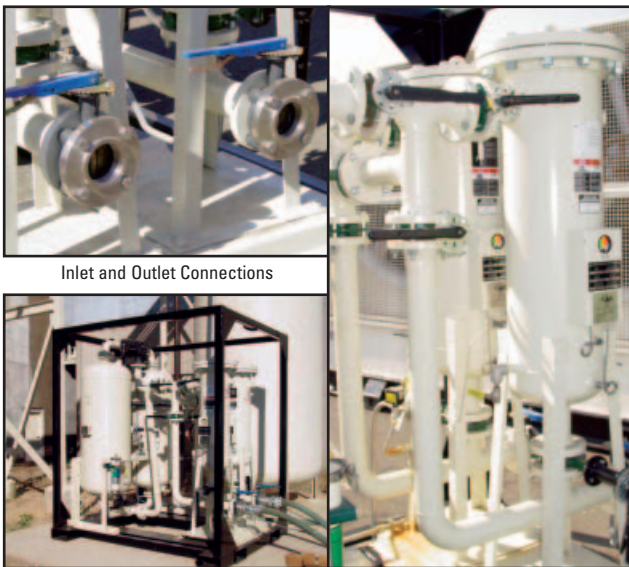

Inlet and Outlet Connections

Clean Dry Air for your Application

Filters with Block and Bypass

### SPECIFICATIONS OF THE 900 CDA PM

- 500 to 900 CFM @ -100° Pressure Dewpoint
- 900 to 1550 CFM @ -40° Pressure Dewpoint
- Purge Air Requirement is approximately 108 CFM
- Dimensions 92"x74"x104" (LxWxH), 6,000 Weight
- Capable of being lifted by either crane or forklift
- 120 volt @ .16 amp single phase
- LCD Digital Readout with memory
- 3" Inlet / Outlet Air Connections

**PETERSON**  
POWER SYSTEMS

**CAT**<sup>®</sup>

[www.petersonpower.com](http://www.petersonpower.com)

California: (800) 963-6446 Oregon: (866) 228-3447

2828 Teagarden Street, San Leandro, CA 94577  
1626 30th Street, Springfield, OR 97478